

Form C: Type Test Verification Report

All Micro-generators connected to the **DNO Distribution Network** shall be **Fully Type Tested**. This form is the **Manufacturer's** declaration of compliance with the requirements of EREC G98.

This form should be used when making a Type Test submission to the Energy Networks Association (ENA) Type Test Register.

If the **Micro-generator** is **Fully Type Tested** and already registered with the ENA Type Test Register, the **Installation Document** should include the **Manufacturer's** Reference Number (the system reference), and this form does not need to be submitted.

Manufacturer's reference number			
Micro-generator technology		Grid Interactive Inverter	
Manufacturer name		Shanghai SIGEN New Energy Technology Co., Ltd.	
Address		No. 175 Weizhan Rd. Lin-gang 201304 Shanghai PEOPLESREPUBLIC OF CHINA	
Tel	021-61000956	Fax	
E-mail	Service@sigenergy.com	Web site	www.sigenergy.com
Registered Capacity , use separate sheet if more than one connection option.	Connection Option		
	-	kW single phase	Model
	5.5	kW three phase	Model
	6.6	kW three phase	Model
	8.8	kW three phase	Model
	11	kW three phase	Model
	-	kW two phases in three phase system	
-	kW two phases split phase system		
Energy storage capacity for Electricity Storage devices	5.38/8.06	kWh	
Description of energy storage capacity:			
The total storage capacity of one inverter can be increased up to 48.36kWh using modules of 5.38kWh and 8.06kWh.			
Differences between Generating Units:			

All models have identical hardware and software. The power capacity of the different models is derated by software.

Manufacturer Type Test declaration. - I certify that all products supplied by the company with the above **Fully Type Tested** reference number will be manufactured and tested to ensure that they perform as stated in this document, prior to shipment to site and that no site modifications are required to ensure that the product meets all the requirements of EREC G98.

Signed	<i>Jiang chen</i>	On behalf of	Shanghai SIGEN New Energy Technology Co., Ltd.
--------	-------------------	--------------	------------------------------------------------

Note that testing can be done by the **Manufacturer** of an individual component or by an external test house.

Where parts of the testing are carried out by persons or organisations other than the **Manufacturer** then that person or organisation shall keep copies of all test records and results supplied to them to verify that the testing has been carried out by people with sufficient technical competency to carry out the tests.

Operating Range: This test should be carried out as specified in A.1.2.10.

Pass or failure of the test should be indicated in the fields below (right hand side), for example with the statement "Pass", "No disconnection occurs", etc. Graphical evidence is preferred.


Test 1

Voltage = 85% of nominal (195.5 V)

Frequency = 47.0 Hz

Power factor = 1

Period of test 20 seconds

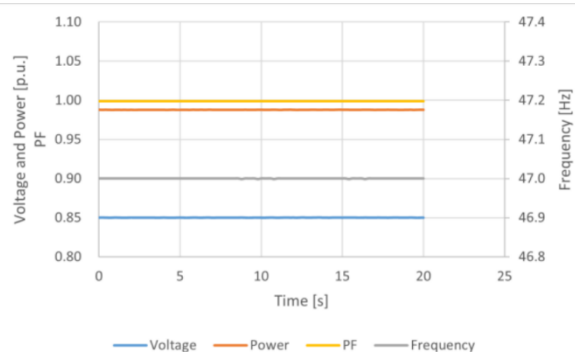


Test 2





Voltage = 85% of nominal (195.5 V)

Frequency = 47.5 Hz

Power factor = 1

Period of test 90 minutes

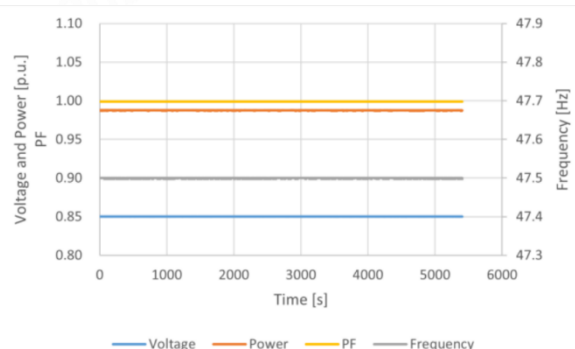
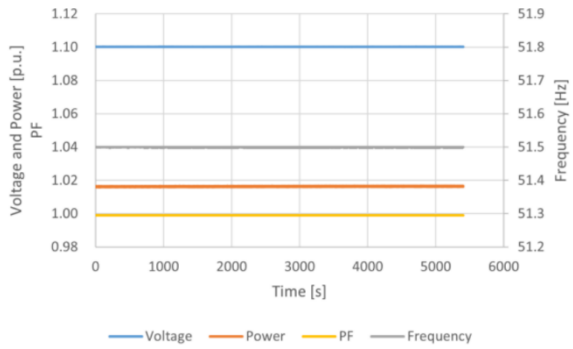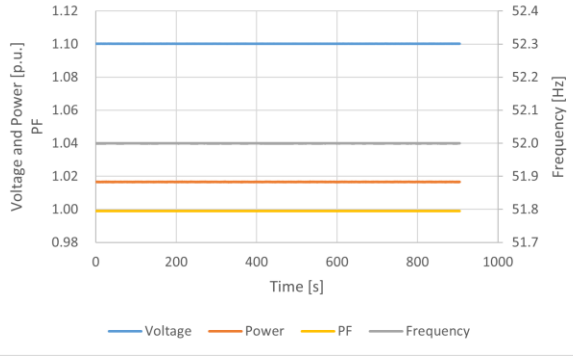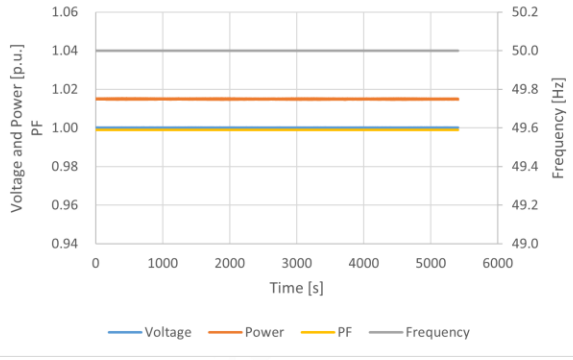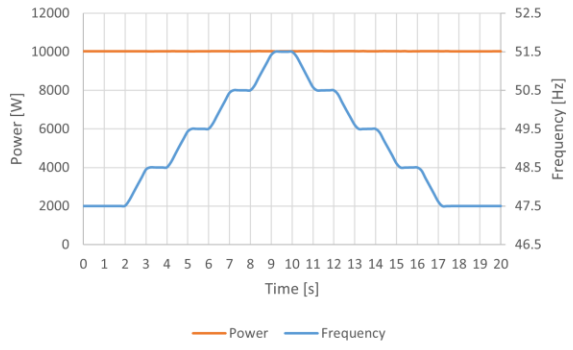
<p>Test 3</p> <p>Voltage = 110% of nominal (253 V).</p> <p>Frequency = 51.5 Hz</p> <p>Power factor = 1</p> <p>Period of test 90 minutes</p>	 <p>Graph showing Voltage and Power [p.u.] and Frequency [Hz] versus Time [s]. The graph displays four horizontal lines: Voltage (blue) at 1.10 p.u., Power (orange) at 1.01 p.u., PF (yellow) at 1.00, and Frequency (grey) at 51.5 Hz. The x-axis ranges from 0 to 6000 s, and the y-axis ranges from 0.98 to 1.12 p.u. and 51.2 to 51.9 Hz.</p>
<p>Test 4</p> <p>Voltage = 110% of nominal (253 V).</p> <p>Frequency = 52.0 Hz</p> <p>Power factor = 1</p> <p>Period of test 15 minutes</p>	 <p>Graph showing Voltage and Power [p.u.] and Frequency [Hz] versus Time [s]. The graph displays four horizontal lines: Voltage (blue) at 1.10 p.u., Power (orange) at 1.01 p.u., PF (yellow) at 1.00, and Frequency (grey) at 52.0 Hz. The x-axis ranges from 0 to 1000 s, and the y-axis ranges from 0.98 to 1.12 p.u. and 51.7 to 52.4 Hz.</p>
<p>Test 5</p> <p>Voltage = 100% of nominal (230 V).</p> <p>Frequency = 50.0 Hz</p> <p>Power factor = 1</p> <p>Period of test 90 minutes</p>	 <p>Graph showing Voltage and Power [p.u.] and Frequency [Hz] versus Time [s]. The graph displays four horizontal lines: Voltage (blue) at 1.00 p.u., Power (orange) at 1.01 p.u., PF (yellow) at 1.00, and Frequency (grey) at 50.0 Hz. The x-axis ranges from 0 to 6000 s, and the y-axis ranges from 0.94 to 1.06 p.u. and 49.0 to 50.2 Hz.</p>
<p>Test 6 RoCoF withstand</p> <p>Confirm that the Micro-Generating Plant is capable of staying connected to the Distribution Network and operate at rates of change of frequency up to 1 Hz/s⁻⁸ as measured over a period of 500 ms.</p>	 <p>Graph showing Power [W] and Frequency [Hz] versus Time [s]. The graph displays two lines: Power (orange) at 10000 W and Frequency (blue) which ramps up from 47.5 Hz to 51.5 Hz between 2s and 10s, and then ramps back down to 47.5 Hz between 10s and 18s. The x-axis ranges from 0 to 20 s, and the y-axis ranges from 0 to 12000 W and 46.5 to 52.5 Hz.</p>

Power Quality – Harmonics: These tests should be carried out as specified in BS EN 61000-3-2. The chosen test should be undertaken with a fixed source of energy at two power levels a) between 45 and 55% and b) at 100% of Registered Capacity . The test requirements are specified in Annex A1 A.1.3.1 (Inverter connected) or Annex A2 A.2.3.1 (Synchronous).						
Micro-generator tested to BS EN 61000-3-2						
Micro-generator rating per phase (rpp)			1.67		kW	
For 3-phase Micro-generators , tick this box if harmonic measurements are identical for all three phases. If the harmonics are not identical for each phase, please replicate this section with the results for each phase.						
Phase L1						
Harmonic	At 45-55% of Registered Capacity ¹		100% of Registered Capacity			
	Measured Value MV in Amps	%	Measured Value MV in Amps	%	Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above
2	0.0050	0.0688	0.0090	0.1241	1.080	
3	0.0066	0.0908	0.0071	0.0983	2.300	
4	0.0073	0.1010	0.0117	0.1617	0.430	
5	0.0309	0.4260	0.0721	0.9937	1.140	
6	0.0011	0.0156	0.0035	0.0485	0.300	
7	0.0884	1.2170	0.0188	0.2587	0.770	
8	0.0030	0.0409	0.0033	0.0450	0.230	
9	0.0041	0.0565	0.0018	0.0253	0.400	
10	0.0020	0.0271	0.0021	0.0286	0.184	
11	0.0573	0.7885	0.0224	0.3087	0.330	
12	0.0068	0.0937	0.0042	0.0572	0.153	
13	0.0238	0.3282	0.0732	1.0076	0.210	
14	0.0022	0.0302	0.0039	0.0542	0.131	

¹ See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

15	0.0038	0.0526	0.0072	0.0985	0.150	
16	0.0071	0.0984	0.0064	0.0882	0.115	
17	0.0863	1.1888	0.0575	0.7918	0.132	
18	0.0060	0.0830	0.0056	0.0778	0.102	
19	0.0446	0.6143	0.0164	0.2262	0.118	
20	0.0035	0.0477	0.0045	0.0615	0.092	
21	0.0045	0.0615	0.0042	0.0581	0.107	0.160
22	0.0026	0.0357	0.0028	0.0385	0.084	
23	0.0219	0.3022	0.0195	0.2690	0.098	0.147
24	0.0133	0.1832	0.0036	0.0500	0.077	
25	0.0254	0.3500	0.0308	0.4247	0.090	0.135
26	0.0037	0.0515	0.0038	0.0524	0.071	
27	0.0059	0.0818	0.0037	0.0516	0.083	0.124
28	0.0052	0.0713	0.0044	0.0611	0.066	
29	0.0095	0.1307	0.0383	0.5278	0.078	0.117
30	0.0034	0.0462	0.0053	0.0735	0.061	
31	0.0353	0.4868	0.0216	0.2976	0.073	0.109
32	0.0060	0.0831	0.0041	0.0558	0.058	
33	0.0071	0.0975	0.0046	0.0633	0.068	0.102
34	0.0039	0.0531	0.0031	0.0426	0.054	
35	0.0037	0.0507	0.0093	0.1283	0.064	0.096
36	0.0057	0.0788	0.0029	0.0397	0.051	
37	0.0066	0.0913	0.0150	0.2064	0.061	0.091
38	0.0041	0.0562	0.0041	0.0567	0.048	
39	0.0066	0.0914	0.0048	0.0662	0.058	0.087
40	0.0052	0.0713	0.0029	0.0397	0.046	
Phase L2						

Harmonic	At 45-55% of Registered Capacity ²		100% of Registered Capacity			
	Measured Value MV in Amps	%	Measured Value MV in Amps	%	Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above
2	0.0073	0.1007	0.0107	0.1476	1.080	
3	0.0042	0.0575	0.0054	0.0744	2.300	
4	0.0060	0.0826	0.0137	0.1884	0.430	
5	0.0382	0.5262	0.0692	0.9526	1.140	
6	0.0009	0.0130	0.0020	0.0275	0.300	
7	0.0933	1.2853	0.0182	0.2513	0.770	
8	0.0034	0.0467	0.0041	0.0558	0.230	
9	0.0021	0.0293	0.0013	0.0179	0.400	
10	0.0016	0.0225	0.0032	0.0445	0.184	
11	0.0558	0.7682	0.0229	0.3152	0.330	
12	0.0034	0.0471	0.0023	0.0311	0.153	
13	0.0235	0.3234	0.0753	1.0375	0.210	
14	0.0024	0.0327	0.0028	0.0385	0.131	
15	0.0032	0.0448	0.0022	0.0301	0.150	
16	0.0045	0.0623	0.0036	0.0498	0.115	
17	0.0862	1.1874	0.0574	0.7908	0.132	
18	0.0034	0.0464	0.0031	0.0429	0.102	
19	0.0454	0.6249	0.0146	0.2012	0.118	
20	0.0022	0.0306	0.0032	0.0444	0.092	
21	0.0045	0.0617	0.0027	0.0369	0.107	0.160
22	0.0033	0.0458	0.0034	0.0472	0.084	
23	0.0263	0.3624	0.0181	0.2489	0.098	0.147

² See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

24	0.0068	0.0932	0.0032	0.0448	0.077	
25	0.0249	0.3428	0.0326	0.4486	0.090	0.135
26	0.0043	0.0586	0.0026	0.0353	0.071	
27	0.0050	0.0692	0.0033	0.0452	0.083	0.124
28	0.0039	0.0541	0.0034	0.0464	0.066	
29	0.0083	0.1143	0.0378	0.5208	0.078	0.117
30	0.0035	0.0482	0.0042	0.0581	0.061	
31	0.0384	0.5294	0.0180	0.2476	0.073	0.109
32	0.0046	0.0631	0.0034	0.0462	0.058	
33	0.0055	0.0763	0.0046	0.0633	0.068	0.102
34	0.0039	0.0541	0.0035	0.0480	0.054	
35	0.0035	0.0489	0.0095	0.1310	0.064	0.096
36	0.0046	0.0628	0.0032	0.0438	0.051	
37	0.0070	0.0958	0.0156	0.2153	0.061	0.091
38	0.0042	0.0578	0.0030	0.0418	0.048	
39	0.0057	0.0788	0.0043	0.0597	0.058	0.087
40	0.0042	0.0585	0.0038	0.0521	0.046	
Phase L3						
Harmo nic	At 45-55% of Registered Capacity ³		100% of Registered Capacity			
	Measured Value MV in Amps	%	Measured Value MV in Amps	%	Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above
2	0.0042	0.0584	0.0042	0.0575	1.080	
3	0.0087	0.1197	0.0096	0.1321	2.300	
4	0.0078	0.1076	0.0123	0.1695	0.430	
5	0.0339	0.4663	0.0616	0.8486	1.140	

³ See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

6	0.0010	0.0141	0.0019	0.0262	0.300	
7	0.0932	1.2837	0.0187	0.2570	0.770	
8	0.0016	0.0225	0.0026	0.0356	0.230	
9	0.0021	0.0294	0.0032	0.0440	0.400	
10	0.0022	0.0297	0.0018	0.0242	0.184	
11	0.0575	0.7919	0.0226	0.3119	0.330	
12	0.0037	0.0508	0.0025	0.0339	0.153	
13	0.0255	0.3507	0.0748	1.0298	0.210	
14	0.0016	0.0226	0.0034	0.0471	0.131	
15	0.0043	0.0591	0.0053	0.0730	0.150	
16	0.0046	0.0639	0.0040	0.0548	0.115	
17	0.0879	1.2109	0.0571	0.7865	0.132	
18	0.0038	0.0527	0.0038	0.0521	0.102	
19	0.0435	0.5989	0.0169	0.2333	0.118	
20	0.0031	0.0431	0.0025	0.0345	0.092	
21	0.0043	0.0591	0.0027	0.0370	0.107	0.160
22	0.0032	0.0442	0.0028	0.0380	0.084	
23	0.0212	0.2918	0.0187	0.2578	0.098	0.147
24	0.0074	0.1015	0.0028	0.0390	0.077	
25	0.0276	0.3802	0.0314	0.4325	0.090	0.135
26	0.0026	0.0360	0.0040	0.0555	0.071	
27	0.0059	0.0814	0.0041	0.0568	0.083	0.124
28	0.0038	0.0529	0.0034	0.0468	0.066	
29	0.0121	0.1663	0.0380	0.5230	0.078	0.117
30	0.0035	0.0478	0.0041	0.0570	0.061	
31	0.0379	0.5217	0.0216	0.2979	0.073	0.109
32	0.0047	0.0653	0.0033	0.0458	0.058	
33	0.0064	0.0881	0.0048	0.0666	0.068	0.102

34	0.0043	0.0589	0.0032	0.0445	0.054	
35	0.0040	0.0553	0.0072	0.0986	0.064	0.096
36	0.0047	0.0652	0.0036	0.0494	0.051	
37	0.0061	0.0844	0.0139	0.1915	0.061	0.091
38	0.0036	0.0495	0.0035	0.0481	0.048	
39	0.0056	0.0767	0.0049	0.0675	0.058	0.087
40	0.0047	0.0649	0.0034	0.0474	0.046	
Test Model: SigenStor EC 5.0 TP						
Note the higher limits for odd harmonics 21 and above are only allowable under certain conditions, if these higher limits are utilised please state the exemption used as detailed in part 6.2.3.4 of BS EN 61000-3-2 in the box below.						

Micro-generator rating per phase (rpp)			3.33		kW		
For 3-phase Micro-generators , tick this box if harmonic measurements are identical for all three phases. If the harmonics are not identical for each phase, please replicate this section with the results for each phase.							
Phase L1							
Harmo nic	At 45-55% of Registered Capacity ⁴		100% of Registered Capacity				
	Measured Value MV in Amps	%	Measured Value MV in Amps	%	Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above	
2	0.0090	0.0622	0.0152	0.1050	1.080		
3	0.0071	0.0493	0.0110	0.0760	2.300		
4	0.0117	0.0811	0.0189	0.1305	0.430		
5	0.0721	0.4983	0.0898	0.6204	1.140		
6	0.0035	0.0243	0.0024	0.0166	0.300		
7	0.0188	0.1297	0.0888	0.6135	0.770		
8	0.0033	0.0226	0.0028	0.0193	0.230		
9	0.0018	0.0127	0.0065	0.0450	0.400		
10	0.0021	0.0144	0.0030	0.0206	0.184		
11	0.0224	0.1548	0.0879	0.6068	0.330		
12	0.0042	0.0287	0.0053	0.0369	0.153		
13	0.0732	0.5053	0.0783	0.5409	0.210		
14	0.0039	0.0272	0.0033	0.0227	0.131		
15	0.0072	0.0494	0.0095	0.0654	0.150		
16	0.0064	0.0442	0.0045	0.0312	0.115		
17	0.0575	0.3971	0.0729	0.5033	0.132		
18	0.0056	0.0390	0.0074	0.0508	0.102		

⁴ See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

19	0.0164	0.1135	0.0859	0.5932	0.118	
20	0.0045	0.0309	0.0047	0.0323	0.092	
21	0.0042	0.0291	0.0060	0.0414	0.107	0.160
22	0.0028	0.0193	0.0033	0.0225	0.084	
23	0.0195	0.1349	0.0551	0.3808	0.098	0.147
24	0.0036	0.0251	0.0069	0.0478	0.077	
25	0.0308	0.2130	0.0532	0.3673	0.090	0.135
26	0.0038	0.0263	0.0032	0.0223	0.071	
27	0.0037	0.0259	0.0065	0.0448	0.083	0.124
28	0.0044	0.0307	0.0036	0.0246	0.066	
29	0.0383	0.2647	0.0448	0.3096	0.078	0.117
30	0.0053	0.0369	0.0059	0.0409	0.061	
31	0.0216	0.1492	0.0497	0.3435	0.073	0.109
32	0.0041	0.0280	0.0033	0.0226	0.058	
33	0.0046	0.0318	0.0063	0.0434	0.068	0.102
34	0.0031	0.0214	0.0035	0.0239	0.054	
35	0.0093	0.0644	0.0344	0.2378	0.064	0.096
36	0.0029	0.0199	0.0048	0.0328	0.051	
37	0.0150	0.1035	0.0369	0.2550	0.061	0.091
38	0.0041	0.0284	0.0030	0.0206	0.048	
39	0.0048	0.0332	0.0044	0.0302	0.058	0.087
40	0.0029	0.0199	0.0032	0.0222	0.046	
Phase L2						
Harmo nic	At 45-55% of Registered Capacity ⁵		100% of Registered Capacity			

⁵ See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

	Measured Value MV in Amps	%	Measured Value MV in Amps	%	Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above
2	0.0107	0.0740	0.0143	0.0987	1.080	
3	0.0054	0.0373	0.0036	0.0251	2.300	
4	0.0137	0.0945	0.0185	0.1276	0.430	
5	0.0692	0.4777	0.0829	0.5727	1.140	
6	0.0020	0.0138	0.0013	0.0091	0.300	
7	0.0182	0.1261	0.0888	0.6136	0.770	
8	0.0041	0.0280	0.0052	0.0360	0.230	
9	0.0013	0.0090	0.0022	0.0155	0.400	
10	0.0032	0.0223	0.0023	0.0160	0.184	
11	0.0229	0.1581	0.0903	0.6238	0.330	
12	0.0023	0.0156	0.0031	0.0213	0.153	
13	0.0753	0.5203	0.0778	0.5375	0.210	
14	0.0028	0.0193	0.0040	0.0274	0.131	
15	0.0022	0.0151	0.0029	0.0201	0.150	
16	0.0036	0.0250	0.0029	0.0198	0.115	
17	0.0574	0.3966	0.0770	0.5319	0.132	
18	0.0031	0.0215	0.0032	0.0220	0.102	
19	0.0146	0.1009	0.0860	0.5941	0.118	
20	0.0032	0.0222	0.0039	0.0269	0.092	
21	0.0027	0.0185	0.0023	0.0156	0.107	0.160
22	0.0034	0.0237	0.0021	0.0147	0.084	
23	0.0181	0.1248	0.0556	0.3838	0.098	0.147
24	0.0032	0.0224	0.0034	0.0235	0.077	
25	0.0326	0.2250	0.0518	0.3576	0.090	0.135
26	0.0026	0.0177	0.0030	0.0210	0.071	
27	0.0033	0.0226	0.0030	0.0207	0.083	0.124

28	0.0034	0.0233	0.0021	0.0143	0.066	
29	0.0378	0.2612	0.0463	0.3198	0.078	0.117
30	0.0042	0.0292	0.0031	0.0215	0.061	
31	0.0180	0.1242	0.0477	0.3291	0.073	0.109
32	0.0034	0.0232	0.0025	0.0171	0.058	
33	0.0046	0.0318	0.0036	0.0252	0.068	0.102
34	0.0035	0.0241	0.0026	0.0178	0.054	
35	0.0095	0.0657	0.0355	0.2454	0.064	0.096
36	0.0032	0.0220	0.0029	0.0202	0.051	
37	0.0156	0.1080	0.0377	0.2603	0.061	0.091
38	0.0030	0.0210	0.0028	0.0193	0.048	
39	0.0043	0.0299	0.0031	0.0215	0.058	0.087
40	0.0038	0.0261	0.0024	0.0169	0.046	
Phase L3						
Harmo nic	At 45-55% of Registered Capacity ⁶		100% of Registered Capacity			
	Measured Value MV in Amps	%	Measured Value MV in Amps	%	Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above
2	0.0042	0.0288	0.0096	0.0664	1.080	
3	0.0096	0.0662	0.0081	0.0558	2.300	
4	0.0123	0.0850	0.0176	0.1217	0.430	
5	0.0616	0.4256	0.0829	0.5724	1.140	
6	0.0019	0.0132	0.0019	0.0128	0.300	
7	0.0187	0.1289	0.0896	0.6192	0.770	
8	0.0026	0.0178	0.0034	0.0235	0.230	
9	0.0032	0.0221	0.0046	0.0321	0.400	

⁶ See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

10	0.0018	0.0121	0.0048	0.0332	0.184	
11	0.0226	0.1564	0.0882	0.6093	0.330	
12	0.0025	0.0170	0.0025	0.0174	0.153	
13	0.0748	0.5165	0.0805	0.5563	0.210	
14	0.0034	0.0236	0.0021	0.0144	0.131	
15	0.0053	0.0366	0.0054	0.0370	0.150	
16	0.0040	0.0275	0.0043	0.0296	0.115	
17	0.0571	0.3944	0.0732	0.5059	0.132	
18	0.0038	0.0261	0.0044	0.0302	0.102	
19	0.0169	0.1170	0.0870	0.6011	0.118	
20	0.0025	0.0173	0.0029	0.0197	0.092	
21	0.0027	0.0186	0.0045	0.0313	0.107	0.160
22	0.0028	0.0191	0.0042	0.0288	0.084	
23	0.0187	0.1293	0.0560	0.3866	0.098	0.147
24	0.0028	0.0195	0.0038	0.0262	0.077	
25	0.0314	0.2169	0.0535	0.3693	0.090	0.135
26	0.0040	0.0278	0.0028	0.0194	0.071	
27	0.0041	0.0285	0.0045	0.0311	0.083	0.124
28	0.0034	0.0234	0.0036	0.0249	0.066	
29	0.0380	0.2623	0.0440	0.3040	0.078	0.117
30	0.0041	0.0286	0.0034	0.0238	0.061	
31	0.0216	0.1494	0.0500	0.3451	0.073	0.109
32	0.0033	0.0230	0.0027	0.0186	0.058	
33	0.0048	0.0334	0.0042	0.0287	0.068	0.102
34	0.0032	0.0223	0.0028	0.0195	0.054	
35	0.0072	0.0494	0.0338	0.2337	0.064	0.096
36	0.0036	0.0248	0.0029	0.0202	0.051	
37	0.0139	0.0960	0.0391	0.2701	0.061	0.091

38	0.0035	0.0241	0.0032	0.0220	0.048	
39	0.0049	0.0339	0.0034	0.0232	0.058	0.087
40	0.0034	0.0238	0.0029	0.0200	0.046	
Test Model: SigenStor EC 10.0 TP						

Note the higher limits for odd harmonics 21 and above are only allowable under certain conditions, if these higher limits are utilised please state the exemption used as detailed in part 6.2.3.4 of BS EN 61000-3-2 in the box below.

Additional comments:

Power Quality – Voltage fluctuations and Flicker: These tests should be undertaken in accordance with EREC G98 Annex A1 A.1.3.3 (**Inverter** connected) or Annex A2 A.2.3.3 (Synchronous).

The standard test impedance is 0.4 Ω for a single phase **Micro-generating Plant** (and for a two phase unit in a three phase system) and 0.24 Ω for a three phase **Micro-generating Plant** (and for a two phase unit in a split phase system). Please ensure that both test and standard impedance are completed on this form. If the test impedance (or the measured impedance) is different to the standard impedance, it must be normalised to the standard impedance as follows (where the **Power Factor** of the generation output is 0.98 or above):

$d_{\text{max normalised value}} = (\text{Standard impedance} / \text{Measured impedance}) \times \text{Measured value}.$

Where the **Power Factor** of the output is under 0.98 then the X to R ratio of the test impedance should be close to that of the standard impedance.

The stopping test should be a trip from full load operation.

The duration of these tests needs to comply with the particular requirements set out in the testing notes for the technology under test.

The test date and location must be declared.

Test start date		06 Dec. 2023			Test end date	06 Dec. 2023			
Test location		Shanghai SIGEN New Energy Technology Co., Ltd.							
		Starting			Stopping			Running	
		d(max)	d(c)	d(t)	d(max)	d(c)	d(t)	P _{st}	P _{It} 2 hours
Measure d Values at test impedan ce	L1	0.37	0.32	0.00	0.32	0.27	0.00	0.13	0.11
	L2	1.59	1.44	0.00	0.38	0.34	0.00	0.73	0.37
	L3	0.33	0.32	0.00	0.36	0.30	0.00	0.13	0.11

Normalised to standard impedance	L1	0.37	0.32	0.00	0.32	0.27	0.00	0.13	0.11
	L2	1.59	1.44	0.00	0.38	0.34	0.00	0.37	0.37
	L3	0.33	0.32	0.00	0.36	0.30	0.00	0.13	0.11
Normalised to required maximum impedance		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Limits set under BS EN 61000-3-11		4%	3.3%	3.3%	4%	3.3%	3.3%	1.0	0.65
Test Impedance	R	0.24	Ω		X		0.15	Ω	
Standard Impedance	R	0.24	Ω		X		0.15	Ω	
Maximum Impedance	R	N/A	Ω		X		N/A	Ω	
Test Model: SigenStor EC 10.0 TP									
*Applies to three phase and split single phase Micro-generators . Delete as appropriate. ^ Applies to single phase Micro-generators and Micro-generators using two phases on a three phase system. Delete as appropriate.									
Power quality – DC injection: This test should be carried out in accordance with A 1.3.4 as applicable. The % DC injection (“as % of rated AC current” below) is calculated as follows: % DC injection = Recorded DC value in Amps / base current where the base current is the Registered Capacity (W) / 230 V. The % DC injection should not be greater than 0.25%.									
Model: SigenStor EC 10.0 TP									
Test power level	20%			50%		75%		100%	
Recorded DC value in Amps	0.031			0.035		0.039		0.014	
as % of rated AC current	0.071%			0.080%		0.091%		0.032%	
Limit	0.25%			0.25%		0.25%		0.25%	

Power Quality – Power factor: This test shall be carried out in accordance with A.1.3.2 and A.2.3.2 at three voltage levels and at Registered Capacity and the measured Power Factor must be greater than 0.95 to pass. Voltage to be maintained within $\pm 1.5\%$ of the stated level during the test.			
Model: SigenStor EC 10.0 TP			
	216.2 V	230 V	253 V
20% of Registered Capacity	0.9763	0.9764	0.9789
50% of Registered Capacity	0.9960	0.9960	0.9970
75% of Registered Capacity	0.9980	0.9980	0.9980
100% of Registered Capacity	0.9990	0.9990	0.9990
Power Factor Limit	>0.95	>0.95	>0.95

Protection – Frequency tests: These tests should be carried out in accordance with Annex A1 A.1.2.3 (Inverter connected) or Annex A2 A.2.2.3 (Synchronous). For trip tests, frequency and time delay should be stated. For “no trip tests”, “no trip” can be stated.						
Function	Setting		Trip test		“No trip tests”	
	Frequency	Time delay	Frequency	Time delay	Frequency /time	Confirm no trip
U/F stage 1	47.5 Hz	20 s	47.49Hz	20.07s	47.7 Hz 30 s	No trip
U/F stage 2	47 Hz	0.5 s	47.00Hz	0.515s	47.2 Hz 19.5 s	20.06s trip
					46.8 Hz 0.45 s	0.506s trip
O/F stage 1	52 Hz	0.5 s	52.05Hz	0.524s	51.8 Hz 120.0 s	No trip
					52.2 Hz 0.45 s	0.540s trip
Note. For frequency trip tests the frequency required to trip is the setting ± 0.1 Hz. In order to measure the time delay a larger deviation than the minimum required to operate the projection can be used. The “No trip tests” need to be carried out at the setting ± 0.2 Hz and for the relevant times as shown in the table above to ensure that the protection will not trip in error.						

Protection – Voltage tests: These tests should be carried out in accordance with Annex A1 A.1.2.2 (**Inverter** connected) or Annex A2 A.2.2.2 (Synchronous). For trip tests, voltage and time delay should be stated. For “no trip tests”, “no trip” can be stated.

Function	Setting		Trip test		“No trip tests”	
	Voltage	Time delay	Voltage	Time delay	Voltage /time	Confirm no trip
U/V	184 V	2.5 s	184.26V	2.566s	188 V 5.0 s	No trip
					180 V 2.45 s	2.558s trip
O/V stage 1	262.2 V	1.0 s	262.43V	1.010s	258.2 V 5.0 s	No trip
O/V stage 2	273.7 V	0.5 s	273.93V	0.542s	269.7 V 0.95 s	1.051s trip
					277.7 V 0.45 s	0.540s trip

Note for Voltage tests the Voltage required to trip is the setting ± 3.45 V. The time delay can be measured at a larger deviation than the minimum required to operate the protection. The No trip tests need to be carried out at the setting ± 4 V and for the relevant times as shown in the table above to ensure that the protection will not trip in error.

Protection – Loss of Mains test: For PV **Inverters** shall be tested in accordance with BS EN 62116. Other **Micro-generators** should be tested in accordance with A.2.2.4 at 10%, 55% and 100% of rated power.

To be carried out at three output power levels with a tolerance of plus or minus 5% in Test Power levels.⁷

Test Power	10%	55%	100%	10%	55%	100%
Balancing load on islanded network	95% of Registered Capacity	95% of Registered Capacity	95% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity
Trip time. Limit is 0.5 s	-	-	-	-	-	-
For Multi phase Micro-generators confirm that the device shuts down correctly after the removal of a single fuse as well as operation of all phases.						
Test Power	10%	55%	100%	10%	55%	100%

⁷ See the note in A.2.2.4 if the suggested loading levels are below the minimum stable operating level. If alternative loading levels are chosen, the level should be indicated on the test form and the reason for not testing at 10%/55% of **Registered Capacity** should be stated. The additional comments box at the end of the loss


of mains test sheet can be used for this.

Balancing load on islanded network	95% of Registered Capacity	95% of Registered Capacity	95% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity
Trip time. Ph1 fuse removed	-	-	-	-	-	-
Test Power	10%	55%	100%	10%	55%	100%
Balancing load on islanded network	95% of Registered Capacity	95% of Registered Capacity	95% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity
Trip time. Ph2 fuse removed	-	-	-	-	-	-
Test Power	10%	55%	100%	10%	55%	100%
Balancing load on islanded network	95% of Registered Capacity	95% of Registered Capacity	95% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity	105% of Registered Capacity
Trip time. Ph3 fuse removed	-	-	-	-	-	-
Note for technologies which have a substantial shut down time this can be added to the 0.5 s in establishing that the trip occurred in less than 0.5 s. Maximum shut down time could therefore be up to 1.0 s for these technologies.						
Indicate additional shut down time included in above results.				-ms		
Additional comments:						

For Inverters tested to BS EN 62116 the following sub set of tests should be recorded in the following table.						
Test Power and imbalance	33% -5% Q Test 22	66% -5% Q Test 12	100% -5% P Test 5	33% +5% Q Test 31	66% +5% Q Test 21	100% +5% P Test 10
Trip time. Limit is 0.5 s ⁸	166.0 ms	141.5 ms	279.5 ms	165.5 ms	138.5 ms	277.5 ms
Protection – Frequency change, Vector Shift Stability test: This test should be carried out in accordance with EREC G98 Annex A1 A.1.2.6 (Inverter connected) or Annex A2 A.2.2.6 (Synchronous). Confirmation is required that the Micro-generating Plant does not trip under positive / negative vector shift.						

⁸ If the device requires additional shut down time (beyond 0.5 s but less than 1 s) then this should be stated on this form.


	Start Frequency	Change	Confirm no trip	
Positive Vector Shift	49.0 Hz	+50 degrees	No trip	
Negative Vector Shift	50.0 Hz	- 50 degrees	No trip	
Protection – Frequency change, RoCoF Stability test: The requirement is specified in section 11.3, test procedure in Annex A.1.2.6 (Inverter connected) or Annex A2 A.2.2.6 (Synchronous). Confirmation is required that the Micro-generating Plant does not trip for the duration of the ramp up and ramp down test.				
Ramp range	Test frequency ramp:	Test Duration	Confirm no trip	
49.0 Hz to 51.0 Hz	+0.95 Hzs ⁻¹	2.1 s	No trip	
51.0 Hz to 49.0 Hz	-0.95 Hzs ⁻¹	2.1 s	No trip	
Limited Frequency Sensitive Mode – Overfrequency test: This test should be carried out in accordance with A.1.2.8. The test should be carried out using the specific threshold frequency of 50.4 Hz and Droop of 10%. The measurement tolerances are contained in A.1.2.8.				
Test sequence at Registered Capacity >80%	Measured Active Power Output	Frequency	Primary Power Source	Active Power Gradient Droop(%)
Step a) 50.00 Hz ±0.01 Hz	10079.79 W	50.00Hz	10429.90 W	N/A
Step b) 50.45 Hz ±0.05 Hz	9978.37 W	50.45Hz		9.87
Step c) 50.70 Hz ±0.10 Hz	9475.13 W	50.70Hz		9.92
Step d) 51.15 Hz ±0.05 Hz	8570.35 W	51.15Hz		9.94
Step e) 50.70 Hz ±0.10 Hz	9475.22 W	50.70Hz		9.93
Step f) 50.45 Hz ±0.05 Hz	9977.98 W	50.45Hz		9.83
Step g) 50.00 Hz ±0.01 Hz	10079.61 W	50.0Hz		N/A

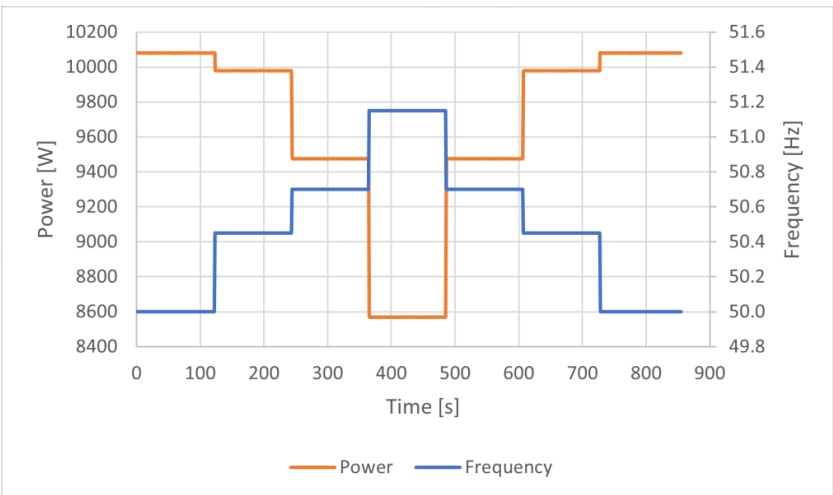

Time [s]	Power [W]	Frequency [Hz]
0	10079.79	50.00
120	9978.37	50.45
240	9475.13	50.70
360	8570.35	51.15
480	9475.22	50.70
600	9977.98	50.45
720	10079.61	50.00

Test at Registered Capacity of 100%				
Test sequence at Registered Capacity 40% - 60%	Measured Active Power Output	Frequency	Primary Power Source	Active Power Gradient Droop(%)
Step a) 50.00 Hz ± 0.01 Hz	5047.94 W	50.00Hz	5259.86 W	N/A
Step b) 50.45 Hz ± 0.05 Hz	4947.13 W	50.45Hz		9.93
Step c) 50.70 Hz ± 0.10 Hz	4444.12 W	50.70Hz		9.94
Step d) 51.15 Hz ± 0.05 Hz	3538.79 W	51.15Hz		9.94
Step e) 50.70 Hz ± 0.10 Hz	4444.49 W	50.70Hz		9.94
Step f) 50.45 Hz ± 0.05 Hz	4947.24 W	50.45Hz		9.94
Step g) 50.00 Hz ± 0.01 Hz	5047.77 W	50.00Hz		N/A

Power response of frequency:

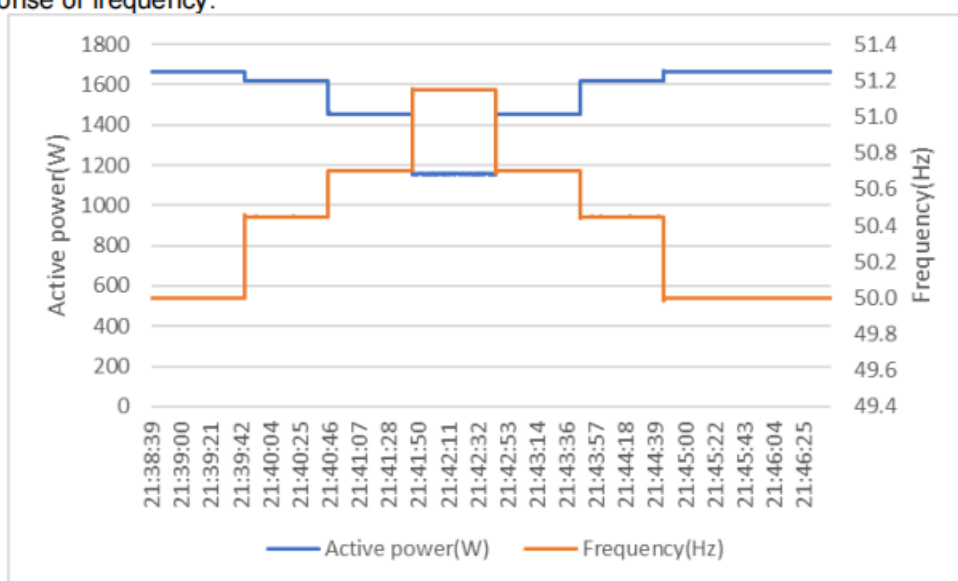

Power output with falling frequency test: This test should be carried out in accordance with A.1.2.7.

Test sequence	Measured Active Power Output	Frequency	Primary power source
Test a) 50 Hz ± 0.01 Hz	10152.19W	50.00Hz	10261.30W
Test b) Point between 49.5 Hz and 49.6 Hz	10152.02W	49.50Hz	10261.96W
Test c) Point between 47.5 Hz and 47.6 Hz	10150.56W	47.50Hz	10260.33W

NOTE: The operating point in Test (b) and (c) shall be maintained for at least 5 minutes

Re-connection timer.						
Test should prove that the reconnection sequence starts after a minimum delay of 20 s for restoration of voltage and frequency to within the stage 1 settings of Table 2. Both the time delay setting and the measured delay should be provided in this form; both should be greater than 20 s to pass. Confirmation should be provided that the Micro-generating Plant does not reconnect at the voltage and frequency settings below; a statement of “no reconnection” can be made.						
Time delay setting	Measured delay		Checks on no reconnection when voltage or frequency is brought to just outside stage 1 limits of table 2.			
20s	29.0s		At 266.2 V	At 180.0 V	At 47.4 Hz	At 52.1 Hz
Confirmation that the Micro-generator does not re-connect.			No reconnection	No reconnection	No reconnection	No reconnection
Fault level contribution: These tests shall be carried out in accordance with EREC G98 Annex A1 A.1.3.5 (Inverter connected) and Annex A2 A.2.3.4 (Synchronous). Please complete each entry, even if the fault contribution is zero.						
For machines with electro-magnetic output				For Inverter output		
Parameter		Symbol	Value	Time after fault	Volts	Amps
Peak Short Circuit current		i_p		20 ms	L1: 30.0 V L2: 31.5 V L3: 29.9 V	L1: 16.2A L2: 17.3A L3: 16.8A
Initial Value of aperiodic current		A		100 ms	L1: 32.8 V L2: 33.4 V L3: 32.2 V	L1: 18.1A L2: 19.2A L3: 18.9A
Initial symmetrical short-circuit current*		I_k		250 ms	L1: 35.3 V L2: 36.5 V L3: 34.8 V	L1: 20.3A L2: 21.2A L3: 20.7A
Decaying (aperiodic) component of short circuit current*		i_{DC}		500 ms	L1: 40.8 V L2: 41.5 V L3: 40.2 V	L1: 9.62A L2: 10.2A L3: 9.98A
Reactance/Resistance Ratio of source*		X/R	2.5	Time to trip	0.31 s	In seconds
For rotating machines and linear piston machines the test should produce a 0 s – 2 s plot of the short circuit current as seen at the Micro-generator terminals.						
* Values for these parameters should be provided where the short circuit duration is sufficiently long to enable interpolation of the plot						
Logic Interface (input port)						

Confirm that an input port is provided and can be used to reduce the Active Power output to zero	Yes
Provide high level description of logic interface, e.g. details in 9.4.3 such as AC or DC signal (the additional comments box below can be used)	Yes
Self-Monitoring solid state switching: No specified test requirements. Refer to EREC G98 Annex A1 A.1.3.6 (Inverter connected).	NA
It has been verified that in the event of the solid state switching device failing to disconnect the Micro-generator , the voltage on the output side of the switching device is reduced to a value below 50 V within 0.5 s.	NA
Cyber security	
Confirm that the Manufacturer or Installer of the Micro-generator has provided a statement describing how the Micro-generator has been designed to comply with cyber security requirements, as detailed in 9.7.	Yes
Additional comments	
The DNO logic interface will take the form of a simple binary output that can be operated by the switch. When the switch is turned off the Power Generating Module can operate normally. When the switch is turned on the Power Generating Module will reduce its Active Power to zero within 5 s. The signal from the Power Generating Module that is being switched is DC (maximum value 3.6Vdc)	