




ENA EREC G98/Nl:2019


<p>Type Approval and Manufacturer declaration of compliance with the requirements of G98/Nl.</p> <p>This form should be used when making a Type Test submission to the Energy Networks Association (ENA).</p> <p>If the Micro-generator is Fully Type Tested and already registered with the ENA Type Test Verification Report Register, the Installation Document should include the Manufacturer's Reference Number (the Product ID), and this form does not need to be submitted.</p> <p>Where the Micro-generator is not registered with the ENA Type Test Verification Report Register this form needs to be completed and provided to the DNO, to confirm that the Microgenerator has been tested to satisfy the requirements of this EREC G98/Nl.</p>			
SSEG Type reference number		HMS-1000W-2T, HMS-900W-2T, HMS-800W-2T, HMS-700W-2T, HMS-600W-2T	
SSEG Type		Photovoltaic Microinverter	
System Supplier name		Hoymiles Power Electronics Inc.	
Address		No.18 Kangjing Road, Hangzhou 310015, China	
Tel	+86 571 28056101	Fax	-
E:mail	info@hoymiles.com	Web site	-
Maximum rated capacity, use separate sheet if more than one connection option.	Connection Option		
	1.0/0.9/0.8/0.7/0.6 per Unit	kW single phase, single, split or three phase system	
	NA	kW three phase	
	NA	kW two phases in three phase system	
	NA	kW two phases split phase system	
SSEG manufacturer/supplier declaration			
<p>Manufacturer Type Test declaration. - I certify that all products supplied by the company with the above Type Tested reference number will be manufactured and tested to ensure that they perform as stated in this document, prior to shipment to site and that no site modifications are required to ensure that the product meets all the requirements of EREC G98/Nl.</p>			
Signed		On behalf of	Hoymiles Power Electronics Inc.


Note that testing can be done by the Manufacturer of an individual component or by an external test house.


Where parts of the testing are carried out by persons or organizations other than the Manufacturer then that person or organization shall keep copies of all test records and results supplied to them to verify that the testing has been carried out by people with sufficient technical competency to carry out the tests.

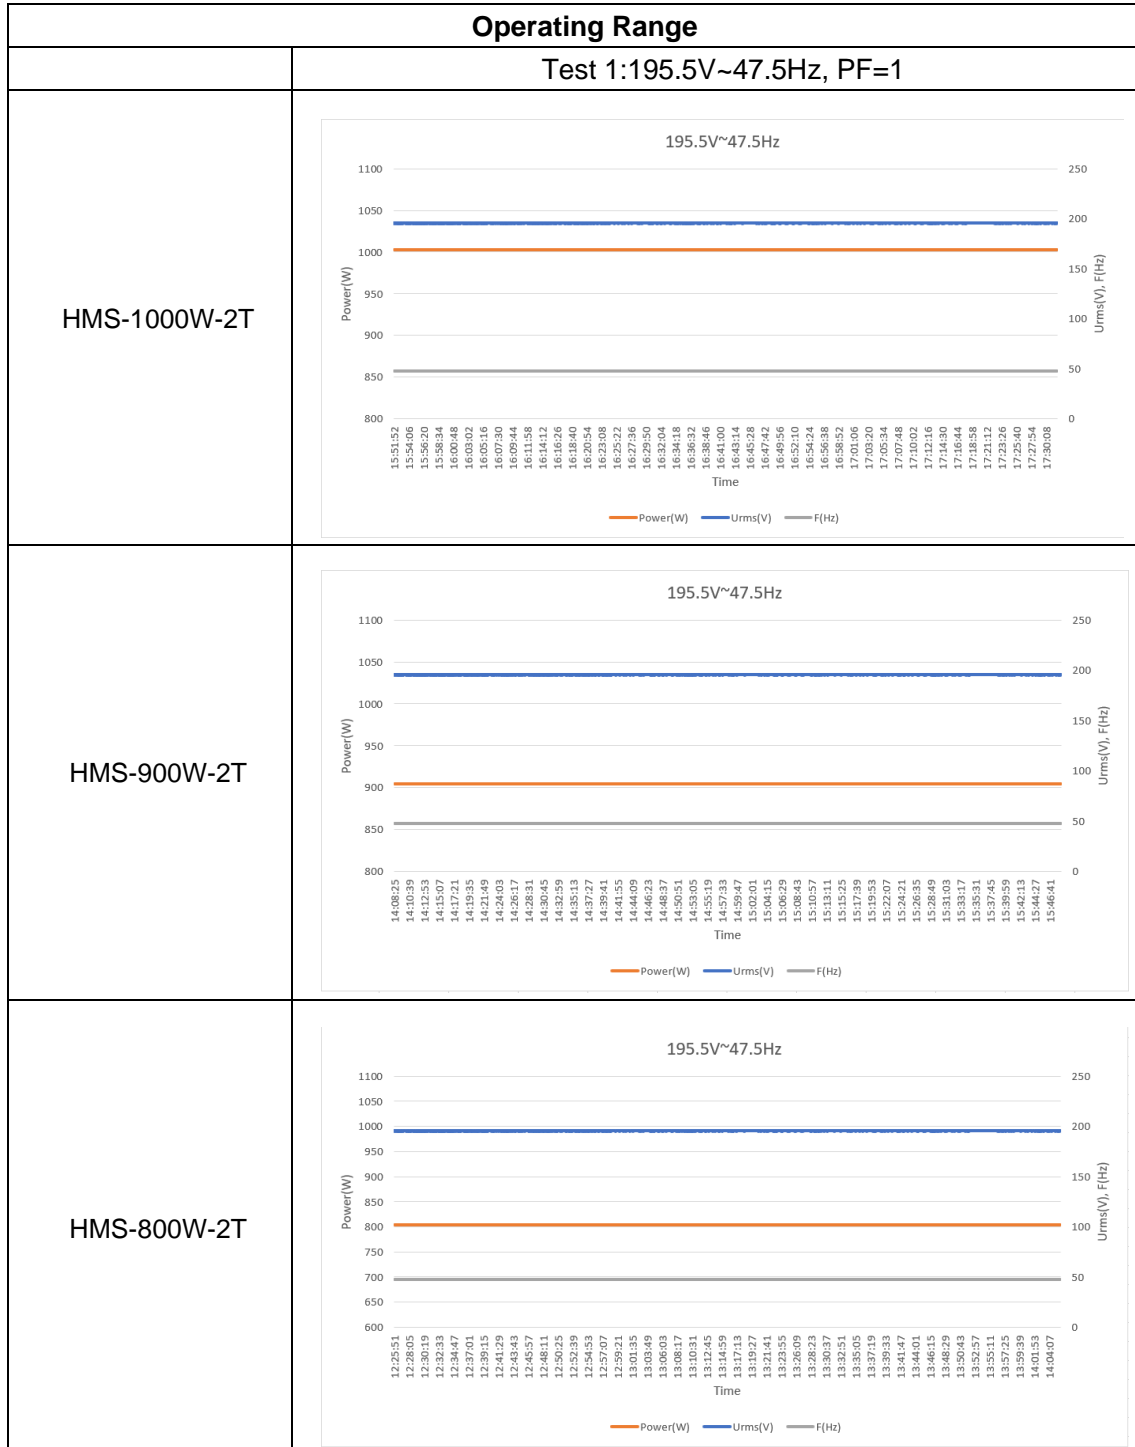

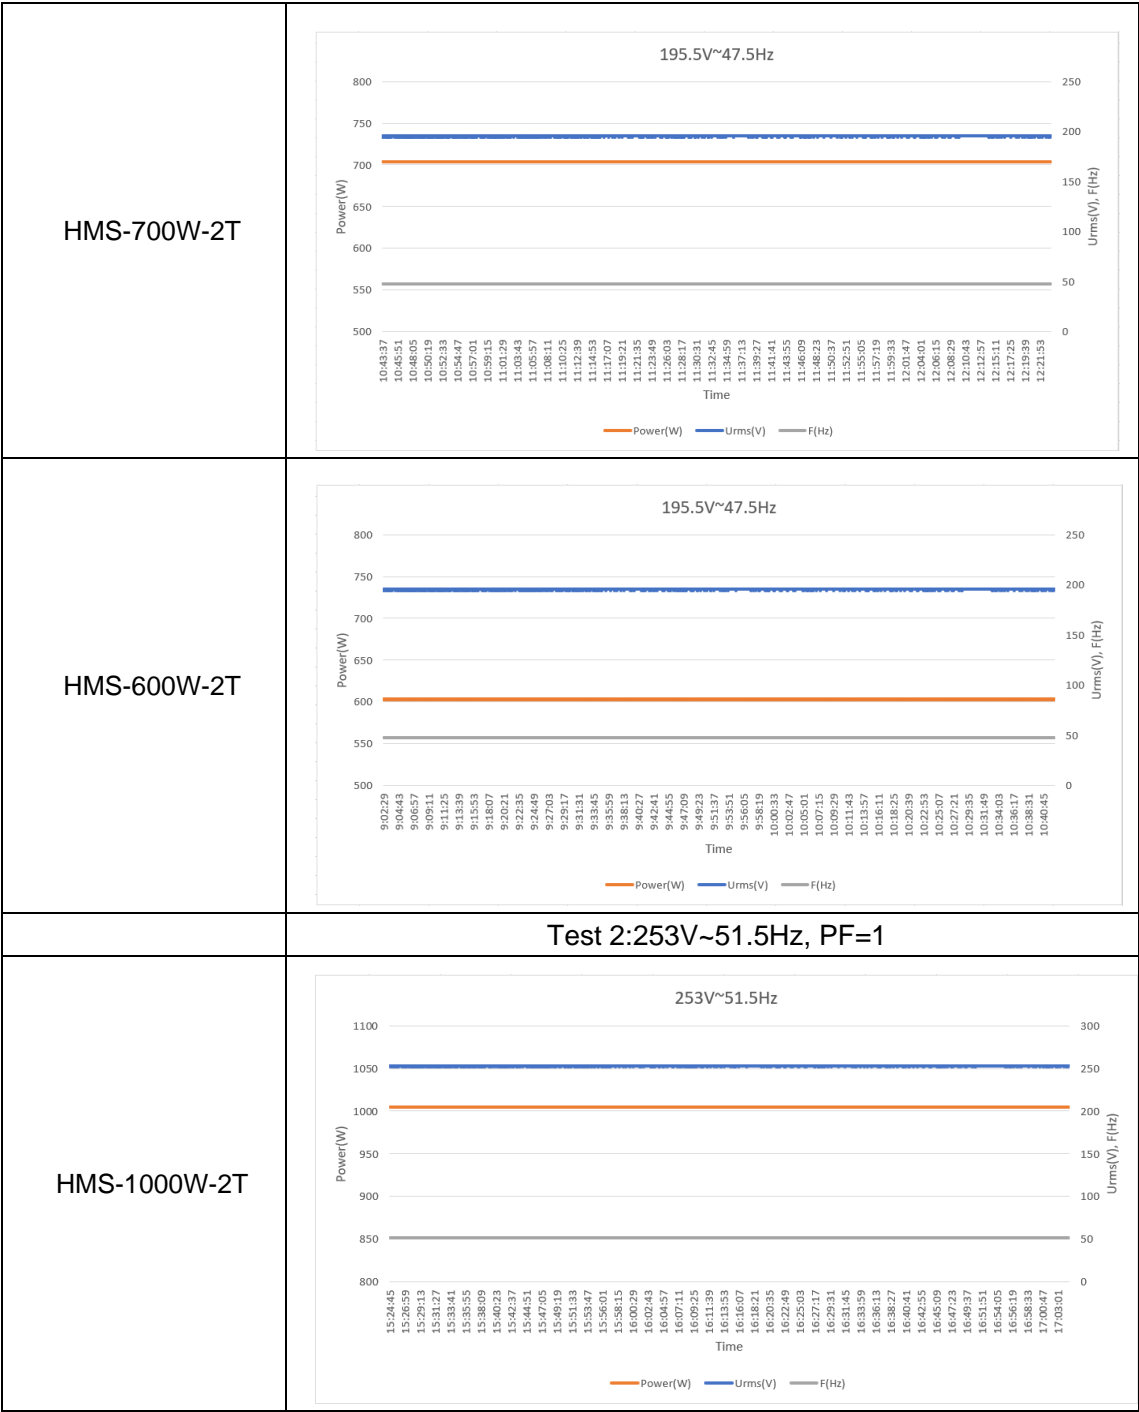

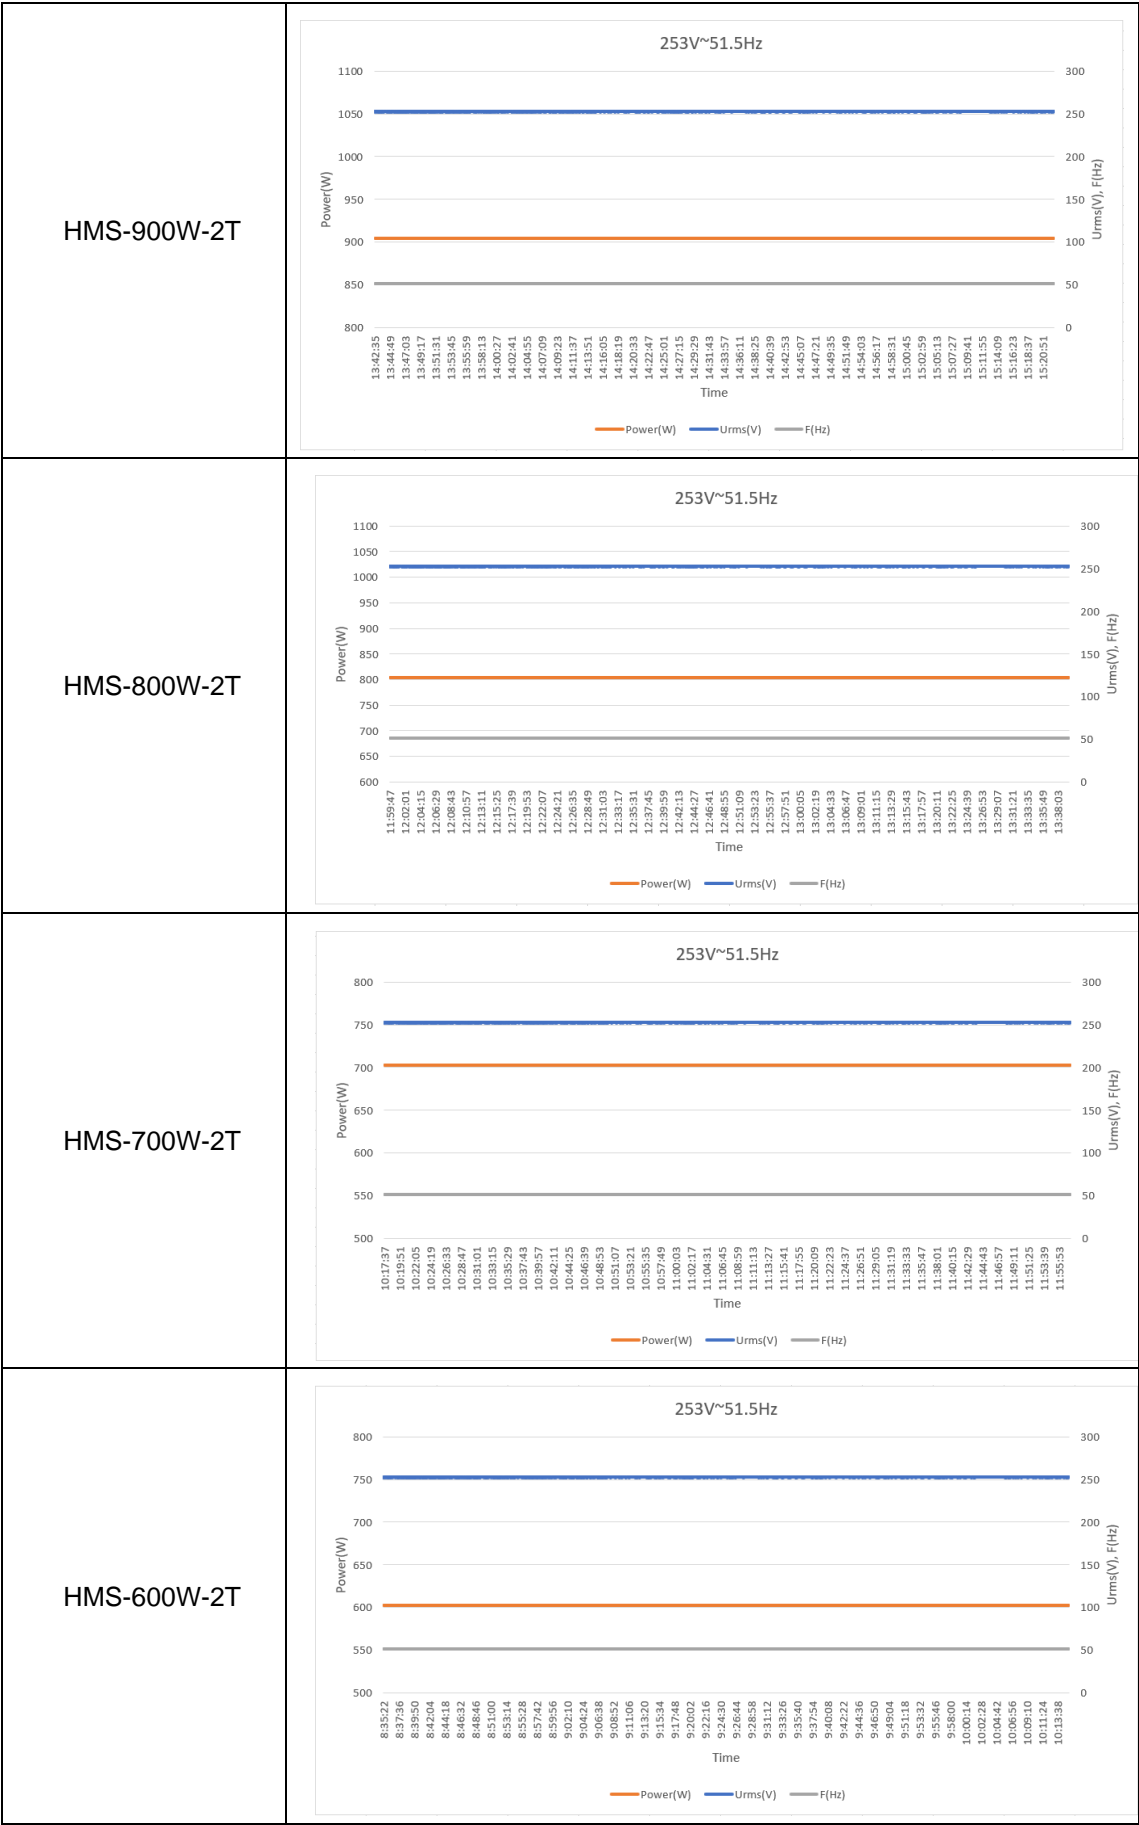

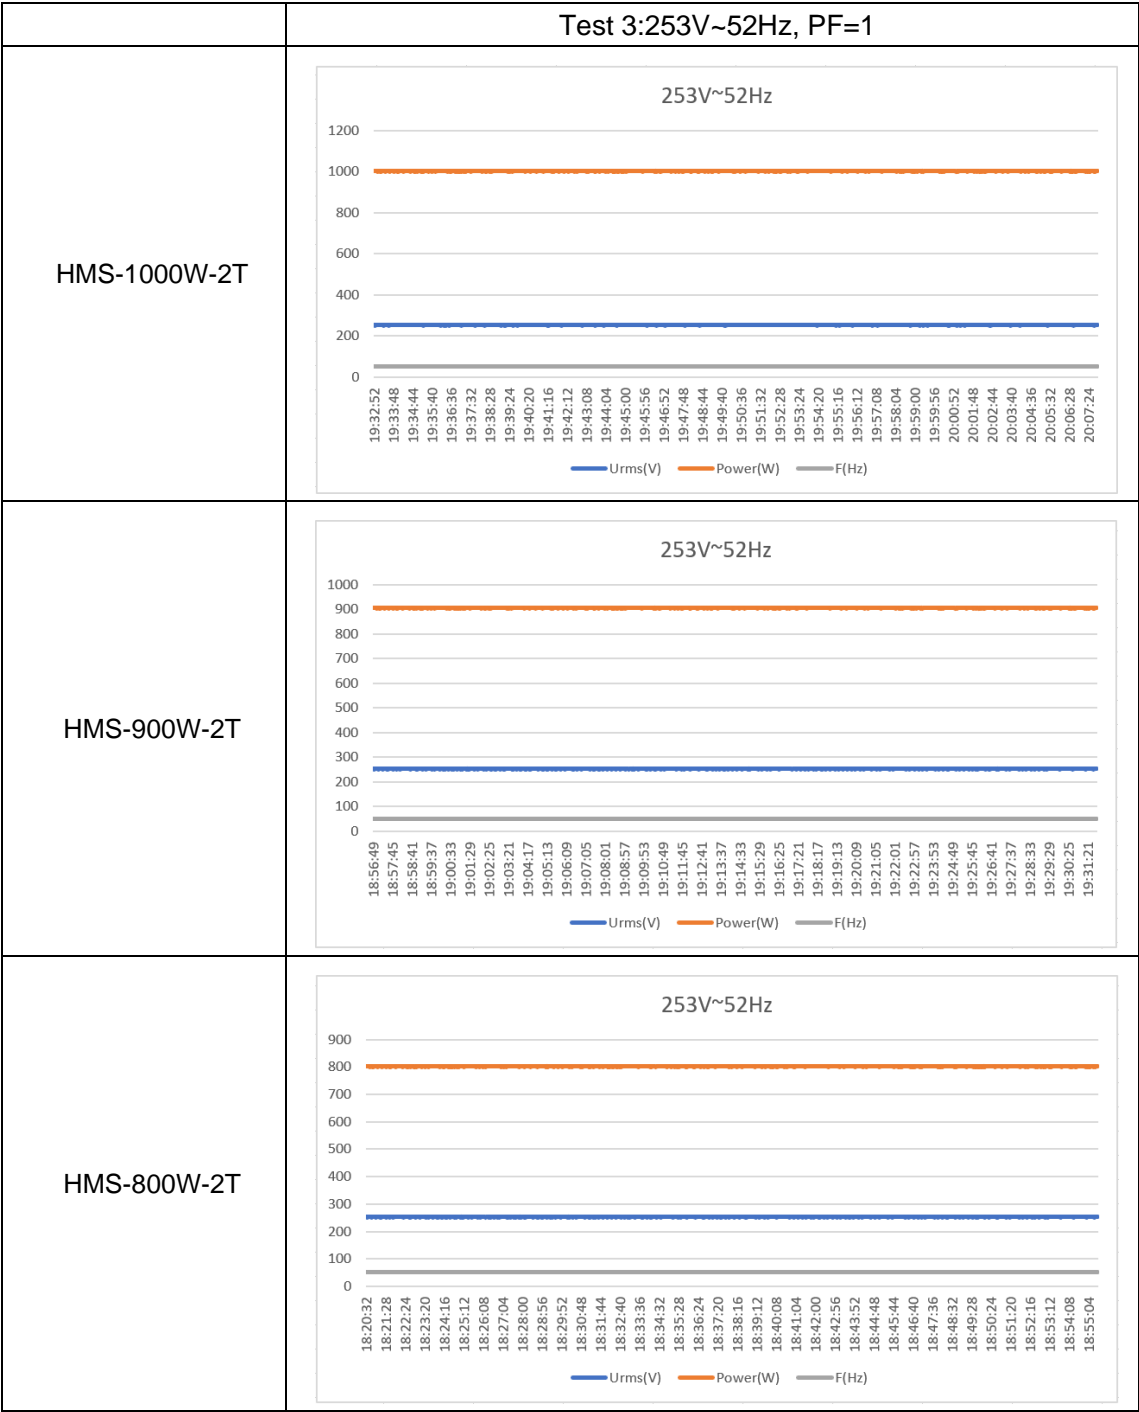

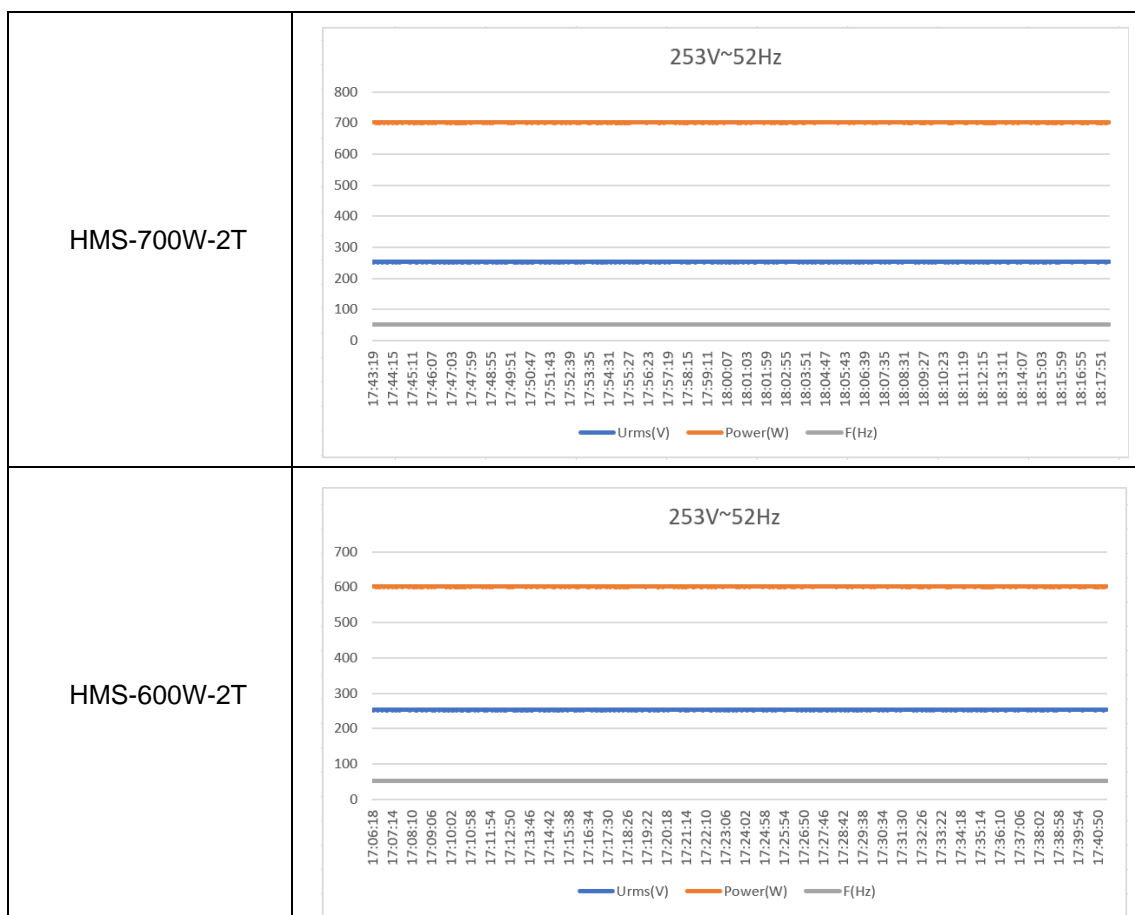

Power Quality – Harmonics:These tests should be carried out as specified in BS EN 61000-3-2.						
SSEG rating per phase (rpp)			1.0	kW	NV=MV*3.68/rpp	
Harmo nic	At 45-55% of rated output		100% of rated output			
	Measured Value(MV) in Amps	Normalized Value (NV) In Amps	Measured Value(MV) In Amps	Normalized Value (NV) In Amps	Limit in BS EN 61000-3- 2 in Amps	Higher limit for odd harmonics 21 and above
2	0.0202	0.0743	0.0414	0.1524	1.080	
3	0.0122	0.0449	0.0365	0.1343	2.300	
4	0.009	0.0331	0.0136	0.05	0.430	
5	0.0152	0.0559	0.048	0.1766	1.140	
6	0.006	0.0221	0.0104	0.0383	0.300	
7	0.0215	0.0791	0.0409	0.1505	0.770	

8	0.0054	0.0199	0.0071	0.0261	0.230	
9	0.0159	0.0585	0.0411	0.1512	0.400	
10	0.004	0.0147	0.006	0.0221	0.184	
11	0.0085	0.0313	0.0449	0.1652	0.450	
12	0.0029	0.0107	0.005	0.0184	0.153	
13	0.0082	0.0302	0.0354	0.1303	0.210	
14	0.0026	0.0096	0.0102	0.0375	0.131	
15	0.0063	0.0232	0.0268	0.0986	0.150	
16	0.0023	0.0085	0.0084	0.0309	0.115	
17	0.0092	0.0339	0.0195	0.0718	0.132	
18	0.0029	0.0107	0.0102	0.0375	0.102	
19	0.0059	0.0217	0.0152	0.0559	0.118	
20	0.0029	0.0107	0.0052	0.0191	0.092	
21	0.0071	0.0261	0.0137	0.0504	0.107	
22	0.002	0.0074	0.0082	0.0302	0.084	
23	0.0093	0.0342	0.0159	0.0585	0.098	0.147
24	0.0028	0.0103	0.0083	0.0305	0.077	
25	0.0071	0.0261	0.0194	0.0714	0.090	0.135
26	0.0032	0.0118	0.0096	0.0353	0.071	
27	0.0049	0.018	0.0188	0.0692	0.083	0.124
28	0.0008	0.0029	0.0078	0.0287	0.066	
29	0.0046	0.0169	0.0149	0.0548	0.078	0.117
30	0.0027	0.0099	0.0114	0.042	0.061	
31	0.0033	0.0121	0.0133	0.0489	0.073	0.109
32	0.0026	0.0096	0.0117	0.0431	0.058	
33	0.0076	0.028	0.0143	0.0526	0.068	0.102
34	0.001	0.0037	0.0076	0.028	0.054	

35	0.0088	0.0324	0.0127	0.0467	0.064	0.096
36	0.0015	0.0055	0.0082	0.0302	0.051	
37	0.0057	0.021	0.0089	0.0328	0.061	0.091
38	0.0023	0.0085	0.0105	0.0386	0.048	
39	0.0074	0.0272	0.0091	0.0335	0.058	0.087
40	0.0009	0.0033	0.0104	0.0383	0.046	
<p>Note the higher limits for odd harmonics 21 and above are only allowable under certain conditions, if these higher limits are utilised please state the exemption used as detailed in part 6.2.3.4 of BS EN 61000-3-2 in the box below.</p>						

Power Quality. Voltage fluctuations and Flicker.								
	Starting			Stopping			Running	
	dmax [%]	dc [%]	d(t) [%]	dmax [%]	dc [%]	d(t) [%]	Pst	Plt 2 hours
Measured Values at test impedance	0.1	0	0	0.1	0	0	0.066	0.066
Normalised to standard impedance	0.1	0	0	0.1	0	0	0.066	0.066
Normalised to required maximum impedance	0.1	0	0	0.1	0	0	0.066	0.066
Limits set under BS EN 61000-3-11	4%	3.3%	3.3%	4%	3.3%	3.3%	1	0.65
Test impedance	R	0.4		Ω	XI	0.25		Ω
Standard impedance	R	0.24* 0.4^		Ω	XI	0.15* 0.25^		Ω
Maximum impedance	R	0.4		Ω	XI	0.25		Ω
Test start date		2023-07-24		Test end date	2023-07-24			
Test location		SHANGHAI TESTING & INSPECTION INSTITUTE FOR ELECTRICAL EQUIPMENT CO., LTD.						

Power quality – DC injection: This test should be carried out in accordance with EN 50438 Annex D.3.10					
Test power level	20%	50%	75%	100%	
Recorded value(mA)	0.439	1.054	3.133	1.895	
as % of rated AC	0.0101	0.0242	0.0721	0.0436	
Limit	0.25%	0.25%	0.25%	0.25%	

Power Quality – Power factor: This test shall be carried out in accordance with EN 50538 Annex D.3.4.1 but with nominal voltage -6% and +10%. Voltage to be maintained within $\pm 1.5\%$ of the stated level during the test.				
	216.2V	230V	253V	
20% of Registered	0.9923	0.9919	0.9906	
50% of Registered	0.9969	0.9961	0.9957	
75% of Registered	0.9978	0.9975	0.9972	
100% of Registered	0.9989	0.9985	0.9978	
Limit (Leading)	>0.95	>0.95	>0.95	
Limit (Lagging)	>0.98	>0.98	>0.98	

Protection. Frequency tests These tests should be carried out in accordance with EN 50438 Annex D.2.4 and the notes in EREC G98/NI Annex A1 A 1.3.2 (Inverter connected) or Annex A2 A.2.2.2 (Synchronous)						
Function	Setting		Trip test		“No trip tests”	
	Frequency	Time delay	Frequency	Time delay	Frequency /time	Confirm no trip
U/F	48Hz	0.5s	48Hz	0.52s	48.2Hz/ 25s	Confirmed
					47.8Hz/ 0.45s	Confirmed
O/F	52Hz	1.0s	52Hz	1.02s	51.8Hz/120s	Confirmed
					52.2Hz/ 0.98s	Confirmed

Protection. Voltage tests These tests should be carried out in accordance with EN 50438 Annex D.2.3 and the notes in EREC G98/NI Annex A1 A 1.3.1 (Inverter connected) or Annex A2 A.2.2.1 (Synchronous)

Function	Setting		Trip test		"No trip tests"	
	Voltage	Time delay	Voltage	Time delay	Voltage /time	Confirm no trip
U/V stage 1	195.5V	3s	195.2V	3.02s	199.5V/5s	Confirmed
U/V stage 2	138V	2s	138.3V	2.02s	142V/2.5s	Confirmed
					134V/1.95s	Confirmed
O/V stage 1	253V	0.5s	252.7V	0.52s	249V/5.0s	Confirmed
					257V/0.45s	Confirmed

Note for Voltage tests the Voltage required to trip is the setting ± 3.45 V. The time delay can be measured at a larger deviation than the minimum required to operate the protection. The No trip tests need to be carried out at the setting ± 4 V and for the relevant times as shown in the table above to ensure that the protection will not trip in error.

Protection. Loss of Mains test. For PV Inverters shall be tested in accordance with BS EN62116. Other Inverters should be tested in accordance with EN 50438 Annex D.2.5 at 10%,55% and 100% of rated power.

Note: Inverter tested according to BS EN 62116.

Test Power and imbalance	33% -5% Q	66% -5% Q	100% -5% P	33% +5% Q	66% +5% Q	100% +5% P
Trip time. Limit is 0.5s	99.3ms	221.8ms	273.5ms	98.4ms	217.7ms	279.3ms

Protection. Frequency change, Stability test This test should be carried out in accordance with EREC G98/NI Annex A1 A 1.3.5 (Inverter connected) or Annex A2 A.2.2.5 (Synchronous).

	Start Frequency	Change	End Frequency	Confirm no trip
Positive Vector Shift	49.5Hz	+50 degrees		Confirmed
Negative Vector Shift	50.5Hz	- 50degrees		Confirmed

Protection – Frequency change, RoCoF Stability test: The requirement is specified in section 11.3, test procedure in Annex A 1.3.5 (Inverter connected) or Annex A2 A.2.2.5 (Synchronous).				
	Ramp range	Test frequency	Test Duration	Confirm no trip
Positive Frequency drift	49Hz to 51Hz	+0.95Hz/sec	2.1s	Confirmed
Negative Frequency drift	51Hz to 49Hz	-0.95Hz/sec	2.1s	Confirmed

Protection – Limited Frequency Sensitive Mode – Over frequency test: This test should be carried out in accordance with EN 50438 Annex D.3.3 Power response to over- frequency. The test should be carried out using the specific threshold frequency of 50.2 Hz and droop of 10%.				
Test sequence at Registered Capacity >80%	Measured Active Power Output (W)	Frequency (Hz)	Primary Power Source	Active Power Gradient
Step a) 50.00 Hz ± 0.01 Hz	1003.6	50		-
Step b) 50.25 Hz ± 0.05 Hz	992.8	50.25		-
Step c) 50.70 Hz ± 0.10 Hz	905.3	50.7		-
Step d) 51.15 Hz ± 0.05 Hz	814.6	51.15		-
Step e) 50.70 Hz ± 0.10 Hz	903.5	50.7		-
Step f) 50.25 Hz ± 0.05 Hz	991.7	50.25		-
Step g) 50.00 Hz ± 0.10 Hz	1002.9	50		-
Test sequence at Registered Capacity 40% - 60%	Measured Active Power Output (W)	Frequency (Hz)	Primary Power Source	Active Power Gradient
Step a) 50.00 Hz ± 0.01 Hz	505.8	50		-
Step b) 50.25 Hz ± 0.05 Hz	494.1	50.25		-
Step c) 50.70 Hz ± 0.10 Hz	406.2	50.7		-
Step d) 51.15 Hz ± 0.05 Hz	319.5	51.15		-
Step e) 50.70 Hz ± 0.10 Hz	405.9	50.7		-
Step f) 50.25 Hz ± 0.05 Hz	494.7	50.25		-
Step g) 50.00 Hz ± 0.10 Hz	504.6	50		-

Steps as defined in EN 50438

Protection – Power output with falling frequency test: This test should be carried out in accordance with EN 50438 Annex D.3.2 active power feed -in at under-frequency.

Test sequence	Measured Active Power Output (W)	Frequency (Hz)	Primary power source
Test a) 50 Hz \pm 0.01 Hz	1004.6	50	DC supply
Test b) Point between 49.5 Hz and 49.6 Hz	1003.8	49.55	DC supply
Test c) Point between 47.5 Hz and 47.6 Hz	1003.5	47.55	DC supply
NOTE: The operating point in Test (b) and (c) shall be maintained for at least 5 minutes			

Protection. Re-connection timer.

Test should prove that the reconnection sequence starts after a minimum delay of 20 s for restoration of voltage and frequency to within the stage 1 settings of Table 2.

Time delay setting	Measured delay	No reconnection when voltage or frequency is brought to just outside stage 1 limits of table 1.			
60s	60.8s	At 257V	At 191.5V	At 47.9Hz	At 52.1Hz
Confirmation that the SSEG does not re-connect.		Confirmed	Confirmed	Confirmed	Confirmed

Fault level contribution. The requirement is specified in section 5.7, test procedure in Annex A or B 1.4.6

For a directly coupled SSEG			For a Inverter SSEG		
Parameter	Symbol	Value	Time after fault	Volts	Amps
Peak Short Circuit current	i_p	N/A	20ms	19.12V	0.473A
Initial Value of aperiodic	A	N/A	100ms	11.67V	0.223A
Initial symmetrical	I_k	N/A	250ms	9.54V	0.112A
Decaying (aperiodic)	i_{DC}	N/A	500ms	5.43V	0.087A
Reactance/Resistance Ratio	X/R	N/A	Time to trip	0.004s	(in seconds)

