



# CERTIFICATE

**Applicant:** **Victron Energy B.V.**  
De Paal 35  
1351 JG Almere  
The Netherlands

**Product:** **Battery Inverter with integrated automatic disconnection device between a generator and the public low-voltage grid**

<b>Model:</b>	MultiPlus-II 48/3000/35-32, MultiPlus-II 48/3000/35-32 GX	MultiPlus-II 48/5000/70-50 MultiPlus-II 48/5000/70-50 GX
<b>Rating:</b>		
DC charge	48VDCnom., 35Amax	48VDCnom., 70Amax
DC discharge	48VDCnom., 75Amax	48VDCnom., 120Amax
AC charge	187-250V, 16Amax, 50/60Hz	187-250V, 18Amax, 50/60Hz
AC discharge	230V, 11Amax, 50/60Hz, 1Ph+N+PE	230V, 19Amax, 50/60Hz, 1Ph+N+PE
Pass through current	32A	50A
Output power (Feed in On-Grid)	2,5kVA / 2,47kW	4,5kVA / 4,4kW
Output power (Off-Grid)	3,0kVA / 2,4kW	5,0kVA / 4,0kW

**Intended use:**

Battery Inverter with an automatic disconnection device with single phase mains surveillance in accordance with Engineering Recommendation G99-1 for photovoltaic systems with a single phase parallel coupling via an inverter to the public mains supply. The automatic disconnection device is an integral part of the aforementioned inverter.

**Applied standards and guidelines:**

**Engineering Recommendation G99/NI Issue 1 – April 2019**

Requirements for the connection of generation equipment in parallel with public distribution networks in Northern Ireland on or after 27 April 2019

The safety concept of an aforementioned representative product corresponds at the time of issue of this certificate to the valid safety specifications for the specified use in accordance with regulations.

The units are only compliant with type A Power Generating Module requirements


**Report No:** 17PP264-26

**Certificate No:** 20-182-00

**Date of issue:** 2020-09-17

**Kiwa Primara GmbH**  
Gewerbestraße 28  
87600 Kaufbeuren  
Germany  
Tel. +49 8341 99726-0  
info@primara.net  
www.kiwa.de

**Tanja Rottach**  
Certification Engineer

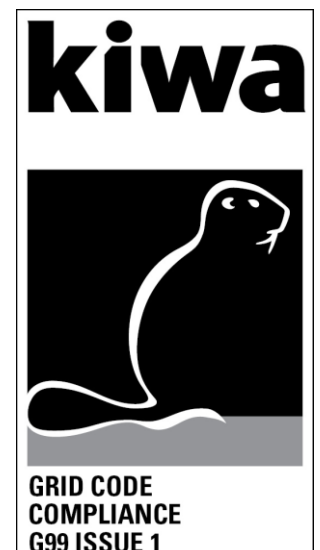



Power Quality – Continuous voltage operation range					
Continuous frequency operation range					
	U [V]	f [Hz]	Cos $\phi$	P [kW]	Limit [%Sn]:
Test 1	85%Un 195,5V	47,00Hz	1,00	100%Sn	-
Measured 20s avg	196,5	47,00	-1,000	86,0%	-
Test 2	85%Un 195,5V	47,50Hz	1,00	100%Sn	-
Measured 90min avg	195,7	47,50	-1,000	85,0%	-
Test 3	110%Un 253V	51,50Hz	1,00	100%Sn	-
Measured 90min avg	253,5	51,50	-0,999	98,0%	-
Test 4	110%Un 253V	52,00Hz	1,00	100%Sn	-
Measured 15min avg	253,5	51,90	-1,000	98,0%	-
Test 5	Start frequency	Change	End frequency	Confirm no trip	
Positive frequency drift	49,5Hz	+1,0Hz/sec	50,0Hz	No trip	
Negative frequency drift	50,5Hz	-1,0Hz/sec	50,0Hz	No trip	



Power Quality – Harmonics						
Generating Unit tested to BS EN 61000-3-12						
Generating Unit rating per phase (rpp)			2,47	kVA	Harmonics % = Measured Value (Amps) x 23/rating per phase (kVA)	
Harmonic	At 45-55% of rated output		100% of rated output		Limit in BS EN 61000-3-12	
	Measured Value (MV) in Amps*	%	Measured Value (MV) in Amps*	%	1 phase	3 phase
2	0,067	0,628	0,044	0,409	8%	8%
3	0,076	0,707	0,077	0,717	21,6%	Not stated
4	0,058	0,538	0,040	0,369	4%	4%
5	0,154	1,435	0,083	0,777	10,7%	10,7%
6	0,039	0,359	0,027	0,249	2,67%	2,67%
7	0,112	1,046	0,054	0,498	7,2%	7,2%
8	0,024	0,219	0,016	0,149	2%	2%
9	0,063	0,588	0,043	0,399	3,8%	Not stated
10	0,014	0,130	0,010	0,090	1,6%	1,6%
11	0,054	0,498	0,026	0,239	3,1%	3,1%
12	0,009	0,080	0,005	0,050	1,33%	1,33%
13	0,036	0,339	0,014	0,130	2%	2%
THD	-	2,408	-	1,459	23%	13%
PWHD	-	3,735	-	1,744	23%	22%



Power Quality – Voltage Fluctuations and Flicker								
Model MultiPlus-II 48/3000/35-32 and MultiPlus-II 48/3000/35-32 GX								
	Starting			Stopping			Running	
	dmax	dc	d(t)	dmax	dc	d(t)	Pst	Plt 2 hours
Measured Values	0,313%	0,313%	0,0ms	0,388%	0,274%	0,0ms	0,021	0,021
Normalised to standard impedance	0,313%	0,313%	0,0ms	0,388%	0,274%	0,0ms	0,021	0,021
Normalised to required maximum impedance	-	-	-	-	-	-	-	-
Limit set under BS EN 61000-3-11	4%	3,3%	3,3%	4%	3,3%	3,3%	1,0	0,65
Limits	4%	3,3%	3,3% 500ms	4%	3,3%	3,3% 500ms	1,0	0,65
Test Impedance	R	0,4	$\Omega$	X	0,25	$\Omega$		
Standard Impedance	R	0,24 * 0,4 ^	$\Omega$	X	0,15 * 0,25 ^	$\Omega$		
Maximum Impedance	R	-	$\Omega$	X	-	$\Omega$		
* Applies to three phase and split single phase Power Generating Modules.								
^ Applies to single phase Power Generating Module and Power Generating Modules using two phases on a three phase system.								



Power Quality – Voltage Fluctuations and Flicker								
Model MultiPlus-II 48/5000/70-50								
	Starting			Stopping			Running	
	dmax	dc	d(t)	dmax	dc	d(t)	Pst	Plt 2 hours
Measured Values	3,344%	3,344%	150,0ms	3,469%	3,377%	0,0ms	0,027	0,027
Normalised to standard impedance	3,344%	3,344%	150,0ms	3,469%	3,377%	0,0ms	0,027	0,027
Normalised to required maximum impedance	3,268%	3,268%	0,0	3,390%	3,300%	0,0ms	0,026	0,026
Limit set under BS EN 61000-3-11	4,0%	3,3%	3,3%	4,0%	3,3%	3,3%	1,00	0,65
Limits	4%	3,3%	3,3% 500ms	4%	3,3%	3,3% 500ms	1,0	0,65
Test Impedance	R	0,4	$\Omega$	X	0,25	$\Omega$		
Standard Impedance	R	0,24 * 0,4 ^	$\Omega$	X	0,15 * 0,25 ^	$\Omega$		
Maximum Impedance	R	0,39	$\Omega$	X	0,24	$\Omega$		
* Applies to three phase and split single phase Power Generating Modules.								
^ Applies to single phase Power Generating Module and Power Generating Modules using two phases on a three phase system.								

Power Quality – DC injection			
Test power level	10%	55%	100%
Recorded value in Amps	0,002	-0,002	-0,006
As % of rated AC current	0,07%	-0,06%	-0,16%
Limit	0,25%	0,25%	0,25%

Power Factor			
Voltage	0,94 pu (216.2 V)	1,0 pu (230 V)	1,1 pu (253 V)
Measured Value	1,000	1,000	1,000
Power Factor Limit	>0,95		



Protection – Frequency Tests						
Function	Setting		Trip test		No trip test	
	Frequency	Time delay	Frequency	Time delay	Frequency time	Confirm no trip
U/F	48,0 Hz	0,5 s	47,99 Hz	0,59 s	48,2 Hz 25,0 s	No trip
					46,8 Hz 0,45 s	
O/F	52,0 Hz	1,0 s	52,00 Hz	1,03 s	51,8 Hz 120 s	No trip
					52,2Hz 0,98 s	

Protection – Voltage Tests.						
Function	Setting		Trip test		No trip test	
	Voltage	Time delay	Voltage	Time delay	Voltage time	Confirm no trip
U/V stage 1	195,5 V	3,0 s	194,1 V	3,04 s	199,5 V 5 s	No trip
U/V stage 2*	138,0 V	2,0 s	-	-	142 V 2,5 s	-
					180V 2,45 s	No trip
O/V	253,0 V	0,5 s	252,2 V	0,58 s	249,0 V 5,0 s	No trip
					257,0 V 0,45 s	

**Note:**  
\*With voltage <80%Un and >115%Un the inverter goes into the VRT/UPS mode and disconnects immediatly.



Protection – Loss of Mains Test according BS EN 62116 for Inverters.						
Test Power and imbalance	33% -5% Q	66% -5% Q	100% -5% Q	33% +5% Q	66% +5% Q	100% +5% Q
Trip time (s)	1,020	1,028	1,051	0,976	0,978	0,958
Protection – Frequency change, Vector Shift Stability test.						
	Start frequency	Change	Confirm no trip			
Positive vector shift	49,5Hz	+50 dregrees	No Trip			
Negative vector shift	50,5Hz	- 50 dregrees	No Trip			
Protection – Frequency Change, RoCoF Stability Test						
Ramp range	Test frequency ramp	Test duration	Confirm no Trip			
49,0 Hz to 51,0 Hz	+0,95 Hzs <sup>-1</sup>	2,1 s	No trip			
51,0 Hz to 49,0 Hz	-0,95 Hzs <sup>-1</sup>	2,1 s	No trip			
Protection – Limited Frequency Sensitive Mode – Over frequency Test						
Active Power response to rising frequency/time plots are attached						N
Test sequence at <b>registered capacity</b> >80%	Measured <b>Active Power</b> output [kW]	Frequency [Hz]	Primary power source (if applicable)	Active Power Gradient		
Step a) 50,00Hz ± 0,01Hz	2,42	50,00	—	—		
Step b) 50,45Hz ± 0,05Hz	2,35	50,45		—		
Step c) 50,70Hz ± 0,10Hz	1,81	50,70		—		
Step d) 51,15Hz ± 0,05Hz	1,27	51,15		—		
Step e) 51,70Hz ± 0,10Hz	1,81	50,70		—		
Step f) 50,45Hz ± 0,05Hz	2,35	50,45		—		
Step g) 50,00Hz ± 0,01Hz	2,42	50,00		≤10,0%P <sub>n</sub> /min		
Test sequence at <b>registered capacity</b> 40% - 60%	Measured <b>Active Power</b> output [kW]	Frequency [Hz]	Primary power source (if applicable)	Active Power Gradient		
Step a) 50,00Hz ± 0,01Hz	1,22	50,00	—	—		
Step b) 50,45Hz ± 0,05Hz	1,19	50,45		—		
Step c) 50,70Hz ± 0,10Hz	0,91	50,70		—		
Step d) 51,15Hz ± 0,05Hz	0,65	51,15		—		
Step e) 50,70Hz ± 0,01Hz	0,91	50,70		—		
Step f) 50,45 Hz ± 0,05Hz	1,19	50,45		≤10,0%P <sub>n</sub> /min		
Step g) 50,00 Hz ± 0,01Hz	1,22	50,00		≤10,0%P <sub>n</sub> /min		



Protection – Reconnection Timer					
Time delay setting	Measured delay	Checks on no reconnection when voltage or frequency is brought to just outside stage 1 limits of Table 10.1.			
60 s	62 s	At 257,0 V	At 191,5 V	At 47,9 Hz	At 52,1 Hz
Confirmation that the <b>Power Generating Module</b> does not re-connect.		No reconnection	No reconnection	No reconnection	No reconnection
Fault Level Contribution					
For Inverter Output					
Time after fault		Volts		Amps	
20ms		85,1		19,27	
100ms		-		-	
250ms		-		-	
500ms		-		-	
Time to trip		0,03		In seconds	
As SSEGs (small-scale embedded generators) for PV are inverter-connected the max. short circuit current is the max. AC current.					

Self-Monitoring Solid state switching	
It has been verified that in the event of the solid state switching device failing to disconnect the Power Park Module, the voltage on the output side of the switching device is reduced to a value below 50 volts within 0.5 s.	NA*
*there are no solid state switching devices in the unit, mechanical relays are provided	

Wiring functional Tests	
Confirm that the relevant test schedule is attached (tests to be undertaken at time of commissioning)	NA

Logic interface (input port)	
Confirm that an input port is provided and can be used to shut down the module.	YES*
*An input port is available and can be used to shut down the module	
Additional Comments	
—	